


# FERRO CONCEPTS - THE SLICKSTER - ASSEMBLY AND ADJUSTMENT


INNCORRECT INSTALLATION MAY CAUSE PRODUCT MALFUNCTION. FOLLOW INSTRUCTIONS CAREFULLY



1. SLIDE PROVIDED SHOULDER STRAP ADJUSTMENT TOOL INTO THE REAR PLATE BAG STRAP SLOT. PLACE TOOL ABOVE THE SEWN SEAMS INSIDE THE SLOT.

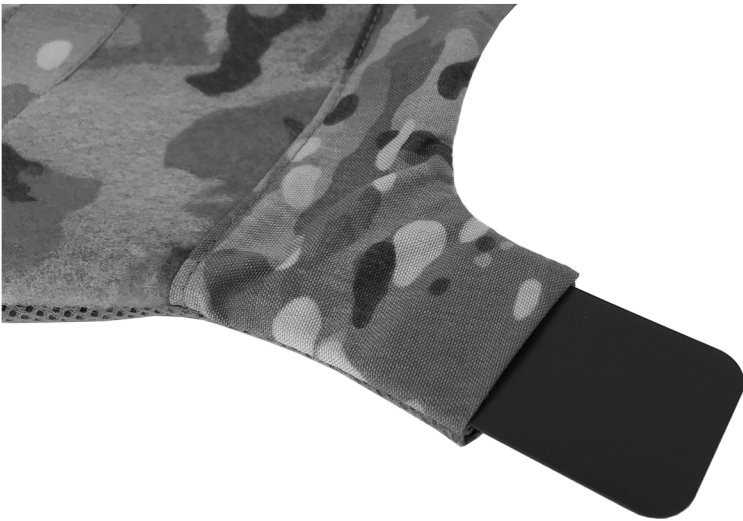

2. SLIDE THE SHOULDER STRAP ABOVE THE TOOL INTO STRAP SLOT.

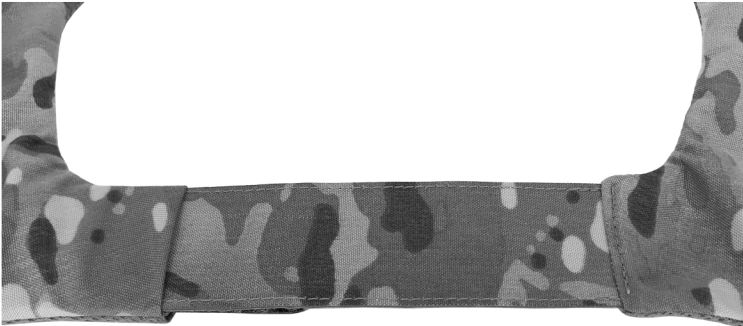


MEASURE BOTH STRAPS

3. WITH THE TOOL STILL INSERTED, ADJUST THE STRAP TO PREFERRED LENGTH. REPEAT STEPS 1-3 FOR OPPOSING SIDE. ENSURE BOTH ARE EQUAL LENGTH.



4. ONCE ADJUSTED, REMOVE STRAP TOOL. PRESS DOWN FIRMLY TO FASTEN THE HOOK AND LOOP VELCRO SECURELY INSIDE SHOULDER STRAP SLOTS.

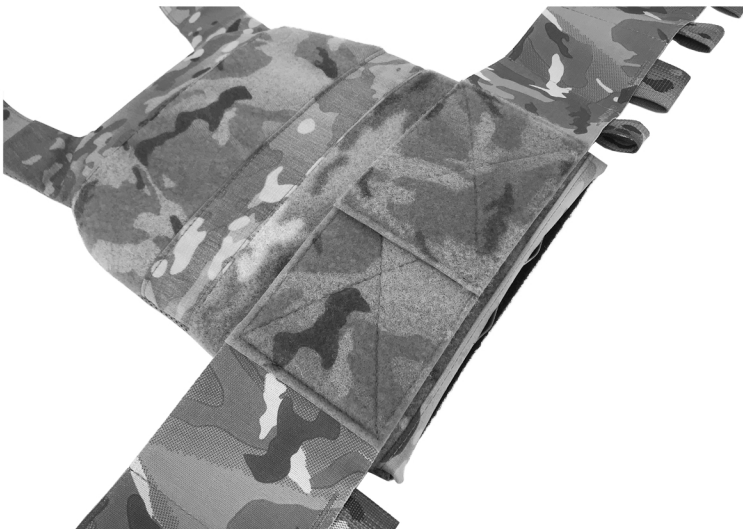

5. FOR A MORE ERGONOMIC FIT AND BETTER ARMOR PLACEMENT, FASTEN REAR CUMMERBUND LOWER ON ON THE REAR PLATE BAG. ADJUST TO PROPER LENGTH.



6. FOR A MORE ERGONOMIC FIT AND BETTER ARMOR PLACEMENT, FASTEN FRONT CUMMERBUND HIGHER ON THE FRONT PLATE BAG.